


AL-Sky® Medium



1 Set bestehend aus:

- 4 Punkthalter Ø 60 mm mit Lasche
- 2 Befestigungsplatten oben
- 2 Befestigungsplatten unten
- 2 Zugstangen mit Gabel
- Ohne Glas


- ♦ AbZ Allgemein bauaufsichtliche Zulassung
- ♦ Typenstatik vorhanden
- ♦ Edelstahl A2 (1.4301) - Korrosionswiderstandsklasse II, DIN EN 10088
- ♦ Glasdicke von VSG 20 mm bis VSG 24 mm
- ♦ Befestigungsplatten in rechteckig, rund und quadratisch
- ♦ Edelstahl A4 auf Anfrage

EN

1 set consisting of:

- 4 point fittings Ø 60 mm with mounting link
- 2 upper fastening plates
- 2 lower fastening plates
- 2 tie rods with yoke
- Without glass

- ♦ German approval
- ♦ Type static calculation
- ♦ Tests according to British Standard
- ♦ AISI 304 Grade Stainless Steel - Corrosion protection class 2, DIN EN 10088
- ♦ Glass thickness range 20 mm to 24 mm
- ♦ Fastening plates in rectangular, round and square
- ♦ Grade 316 Stainless Steel on request

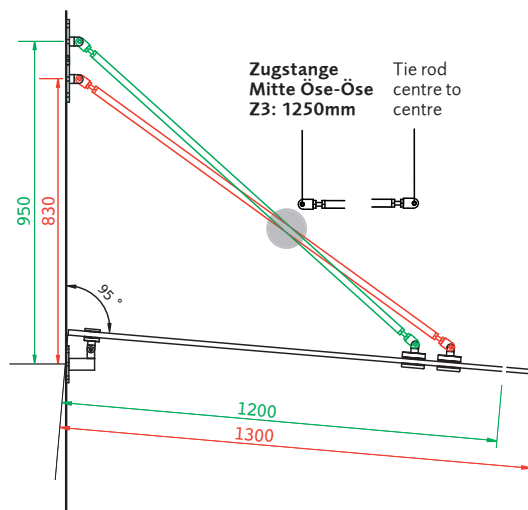



Zugstangen TIE RODS	Halter FITTINGS	Glasstärke GLASS THICKNESS	Traglast** BEARING LOAD
2	4	2 x 10 mm	2,01 kN/m ²
2	4	2 x 12 mm	2,95 kN/m ²
3	6	2 x 10 mm	1,70 kN/m ²
3	6	2 x 12 mm	2,59 kN/m ²

** Max. charakt. Last Max. charact. load

Set mit 3 Zugstangen: 1,5 x Art.Nr.
Set with 3 rods: 1,5 Cat. No.

Glas: VSG aus TVG mit Vierfachfolie
10/1,52/10 mm oder 12/1,52/12 mm

Glass: laminated safety glass consisting of heat strengthened glass with quadruple foil 10/1.52/10 mm or 12/1.52/12 mm

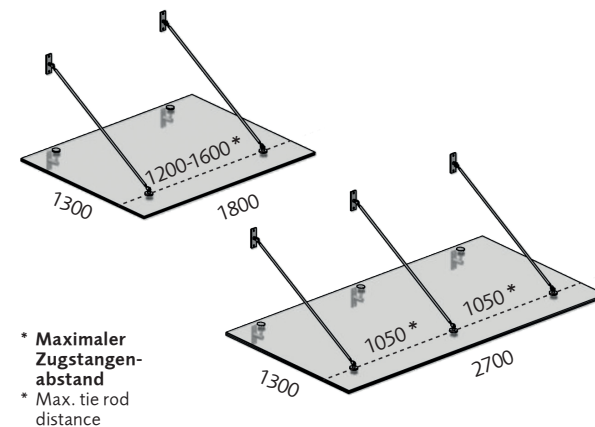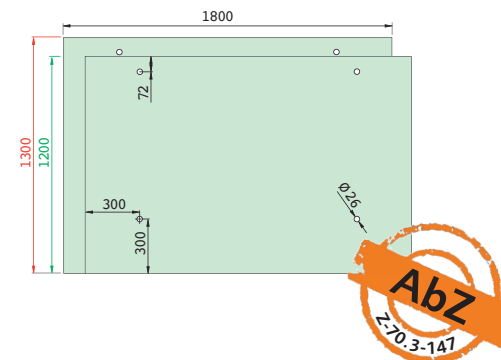

* Maximaler Zugstangenabstand

* Max. tie rod distance

ARTIKEL NR. ITEM NO.	BEFESTIGUNGSPLATTE FASTENING PLATES	BESCHREIBUNG DESCRIPTION	AUSLADUNG OVERHANG	ZUGSTANGE TIE ROD	NEIGUNG DACH CANOPY SLOPE
41VM60-Z3 0579	Rechteckig - Rectangular	Set AL-Sky® Medium	1200 - 1300 mm	Z3 (1250 mm)	max. 10°
41VM60-Z3 0576	Rund - Round				
41VM60-Z3 0577	Quadratisch - Square				