


# DICHTBLINDNIET

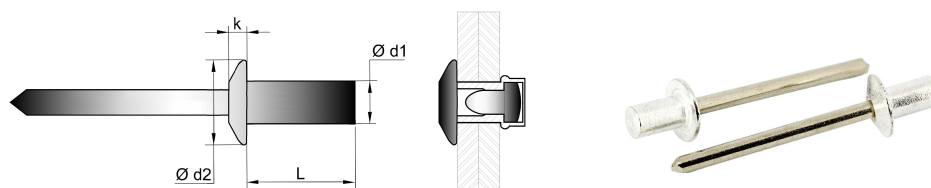

## ALUMINIUM / EDELSTAHL Flachrundkopf

R1231

AlMg 5 / Edelstahl A2

| d1  | L      |  | code              |  |  | d2  | k    |  |  |  |
|-----|--------|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| mm  | mm     | mm                                                                                |                   |                                                                                   | Ø mm                                                                              | mm  | mm   | N                                                                                   | N                                                                                   | kN                                                                                  |
| 3.2 | x 6.5  | 0.5 - 2.0                                                                         | <b>R1231-3206</b> | 1.000                                                                             | 3,3                                                                               | 6.0 | 1.40 | 1250                                                                                | 1070                                                                                |                                                                                     |
|     | x 8.0  | 2.0 - 3.5                                                                         | <b>R1231-3208</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 9.5  | 3.5 - 5.0                                                                         | <b>R1231-3209</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 11.0 | 5.0 - 6.5                                                                         | <b>R1231-3211</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 12.7 | 6.5 - 8.0                                                                         | <b>R1231-3212</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
| 4.0 | x 8.0  | 0.5 - 3.5                                                                         | <b>R1231-4008</b> | 500                                                                               | 4,1                                                                               | 8.0 | 1.70 | 2240                                                                                | 1700                                                                                |                                                                                     |
|     | x 9.5  | 3.5 - 4.5                                                                         | <b>R1231-4009</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 11.0 | 4.5 - 6.5                                                                         | <b>R1231-4011</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 12.0 | 6.5 - 8.0                                                                         | <b>R1231-4012</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
| 4.8 | x 8.0  | 1.0 - 3.0                                                                         | <b>R1231-4808</b> | 500                                                                               | 4,9                                                                               | 9.5 | 2.00 | 3100                                                                                | 2200                                                                                |                                                                                     |
|     | x 9.5  | 3.0 - 4.5                                                                         | <b>R1231-4809</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 11.0 | 4.5 - 6.0                                                                         | <b>R1231-4811</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 12.0 | 6.0 - 7.5                                                                         | <b>R1231-4812</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 14.0 | 7.5 - 9.0                                                                         | <b>R1231-4814</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 16.0 | 9.0 - 11.0                                                                        | <b>R1231-4816</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 18.0 | 11.0 - 13.0                                                                       | <b>R1231-4818</b> | 500                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |
|     | x 21.0 | 13.0 - 16.0                                                                       | <b>R1231-4821</b> | 250                                                                               |                                                                                   |     |      |                                                                                     |                                                                                     |                                                                                     |